

1930ED

1930-ED Electric Drive

COMPACT SLAB SCISSOR LIFT



- ✓ Maximum Performance
- √ Superior Components
- √ Environmentally Better

STANDARD FEATURES:

- Direct Electric Drive providing whisper quiet operation and extended duty cycles
- Easily fits through standard doorways
- · Drives at full height
- Fully proportional drive and lift
- Amazing 45% gradeability
- Fully adjustable drive, steer, lift / lower speeds
- Automatic 'Smart' battery charger for quick charging
- Multiple disc brakes for smooth stopping
- Extra long slide-out deck with 4 oversized rollers for silky smooth operation
- · Folding guardrails
- AC power cable to platform
- · Swing out module for easy servicing
- Nitrate coated pins provide long lasting maintenance free service
- 2 year warranty

EXTREME GRADE
FOR HEAVY CONSTRUCTION USE

www.goGMG.com


Effective Date: January, 2018. Product specifications and prices are subject to change without notice or obligation. The photographse and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using GMG equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is

GMG

1930ED


SPECIFICATIONS

MODEL	1930-ED	
Measurements	US	Metric
Working height maximum	24.9'	7.6 m
A Platform height maximum	18.9'	5.7 m
A Platform height - stowed	40.5"	1.03 m
c Platform length - retracted c extended	64.5" 99.8"	1.64 m 2.55 m
Slide-out platform extension deck	36"	.91 m
È Platform width - outside	29.3"	.74 m
Toeboard height	6.7"	0.17 m
È Height - stowed rails lowered	85" 70.4"	2.16 m 1.79 m
.c. Length stowed w/o ladder	71.6" 65.3"	1.82 m 1.66 m
<u></u> Width	30"	.76 m
<u> </u> Wheelbase	52"	1.32 m
Ground clearance - center- pothole bars deployed	2.1" .78"	5.5 cm 2 cm

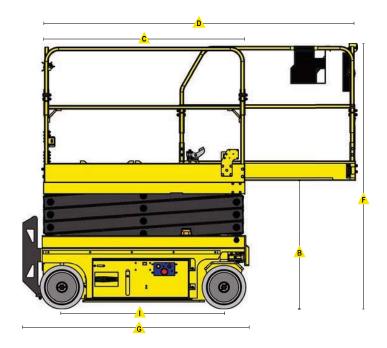

Productivity

1 Todactivity			
Maximum platform occupancy	2		
Lifting capacity	507 lbs	230 kg	
Extension deck capacity	253 lbs	115 kg	
Drive height	Full Height		
Drive speed - stowed	2.5 mph	4.02 km/h	
Drive speed - raised	0.45 mph	0.7 km/h	
Gradeability - stowed	45%		
Turning radius - inside	0		
Raise speed Lower speed	22 seconds 15 seconds		
Controls	Fully Proportional		
Drive	Direct Electric		
Tires - Solid, Non-marking	16" x 5"	40.6 x 12.7 cm	





Power

Power source	24v, 225Ah		
Weight			
ANSI	3,150 lbs	1,430 kg	
CE	3,150 lbs	1,430 kg	

GMG Corporate Office

Distributed By:

3428 Bullock Lane San Luis Obispo, CA 93401

Phone: +1.805.303.2066

Toll Free (USA/Canada): +1.800.301.0499



www.goGMG.com