

 **snorkel**

SL26SL
SL30SL

Speed Level

- » Automatic powered platform levelling.
- » Oscillating front axle.
- » Roll-out deck extension.
- » Descent alarm.
- » High grip all-terrain tyres.
- » Dual multi-disc brakes.
- » Proportional controls.
- » Power line to platform.



SL26SL/SL30SL Speed Level

Specifications

		SL26SL	SL30SL
Max. working height		10 m	11 m
Max. platform height	(A)	8 m	9 m
Platform size (stowed)		1,72 m x 3,66 m	1,72 m x 4,23 m
Platform size (extended)		1,72 m x 4,6 m	N/A
Overall width	(D)	2,13 m	2,13 m
Overall length	(C)	3,79 m	4,30 m
Stowed height	(B)	2,60 m	2,60 m
Chassis ground clearance		30,5 cm	30,5 cm
Platform capacity (SWL)		680 kg	590 kg
Weight		3200 kg	3400 kg
Max. wind speed		12,5 m/s	12,5 m/s
Inside turning radius		3,90 m	3,9 m
Outside turning radius		5,64 m	5,64 m
Gradeability		50 %	50 %
Raise/lower time		21/32 seconds	24/36 seconds
Power source		Kubota D-902 water-cooled diesel	Kubota D-902 water-cooled diesel


Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate operators manual for detailed instructions on the proper use and maintenance.

Standard features


- » Automatic powered platform levelling.
- » Oscilating front axle.
- » Roll-out deck extension.
- » Descent alarm.
- » Power line to platform.
- » Proportional controls.
- » CE approved.
- » Hour meter & on-board diagnostics display.
- » Fold-down guard rails.
- » 3 years warranty.



LEVELLING CAPABILITIES

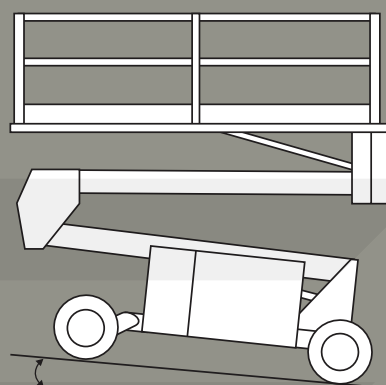

9° front to rear

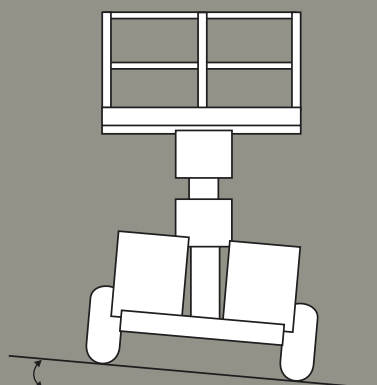

13° side-to-side

