

## **Electric Boom Lift**

- » Working height up to 16 m.
- » Direct DC drive parallel wired wheel motors
- » Multi-function proportional controls.
- » Power line to platform.
- » Suitable for indoor and outdoor use.

- » Zero tailswing.
- » Hour meter & on-board diagnostics display.
- » Standard non-marking tyres.
- » Efficient direct electric drive.
- » Exclusive @ OMEGA 3 years warranty.


## **A46JE** Electric Boom

Specifications

	A46JE
Max. working height	16 m
Max. platform height	14 M
Platform capacity (SWL)	227 kg
Max. working outreach	7,35 m
Overall width	1,70 m
Overall length	5,60 m
Stowed height	2 M
Weight	6.850 kg
Ground clearance	15,20 cm
Max. drive height	16 m
Max. drive speed (stowed)	5,10 km/h
Max. drive speed (elevated)	o,80 km/h
Turret rotation (non continuous)	360 degrees
Gradeability	30%
Inside turning radius	o,53 m
Power source	8x 6 V - 36o Ah Batteries

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate operators manual for detailed instructions on the proper use and maintenance.

## WORKING ENVELOPE

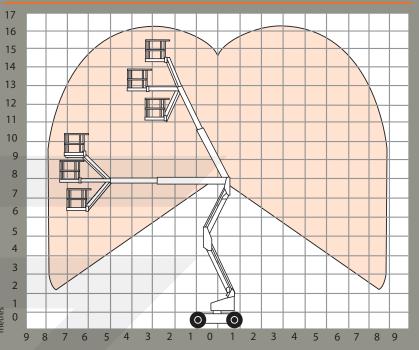

## Standard features

- » Proportional one hand control
- » Ultra-tight inside turning radius
- » Power cable to platform
- » Integrated battery charger (DC)
- » Exclusive @ OMEGA 3 years warranty
- » Ground control station
- » CE approved
- » On board diagnostic display
- » Direct DC drive parallel wired wheel motors
- » 5 year structural warranty



