



S-SERIES



Electric Boom Lifts

- » Non-skid metal deck construction.
- » Easy access sliding side gate for material loading.
- » AC power to platform.
- » Pinless guardrail system for quick and simple guard rail lowering.
- » Fully proportional drive and lift controls.
- » Oscillating front and rear axles for frame leveling ability.
- » High-torque power package with four wheel drive.
- » Emergency shut-off at platform and lower controls.

S-Series Electric Boom


Specifications

	40-S	60-S
Max. working height	14,2 m	20 m
Max. platform height	12,2 m	18,3 m
Platform capacity (SWL)	1800 kg	1350 kg
Platform length	6,7 m	6,7 m
Overall width	2,28 m	2,3 m
Overall length	6,7 m	6,9 m
Stowed height	2 m	2,4 m
Weight	10860 kg	18000 kg
Ground clearance	46 cm	41 cm
Max. drive height	9,1 m	12,2 m
Max. drive speed (stowed)	6,4 km/h	6,4 km/h
Max. drive speed (elevated)	0,8 km/h	0,8 km/h
Platform rotation	180 degrees	180 degrees
Gradeability	40 %	40 %
Inside turning radius	2,4 m	3 m
Power source	Kubota turbo diesel v-3800T	Kubota turbo diesel v-3800T

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate operators manual for detailed instructions on the proper use and maintenance.

Standard features

- » Tripple joystick interface.
- » Fully proportional multi-function controls.
- » Large swing module doors for access to all components.
- » On-board diagnostics center.
- » Logically grouped components and numbered wiring for easy reference.
- » Emergency shut-off at platform and lower controls.
- » Hour meter
- » Powder coat finish

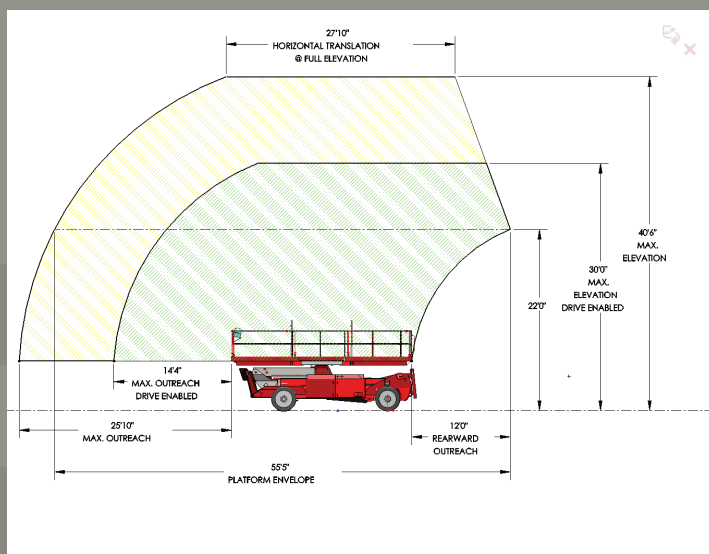

Optional features

- » Flashing beacons (continuous)
- » Air line to platform.
- » Automotive horn.
- » Water line to platform
- » Platform control box cover